

A close-up photograph of several thick, rectangular steel plates stacked on top of each other. The plates are a dark, metallic blue-grey color. The focus is sharp on the top edge of the uppermost plate, showing its thickness and the texture of the metal. The background is blurred, showing more of the same plates. The lighting is soft, highlighting the industrial nature of the material.

Facts and Figures 2024

At a glance


Dillinger's main data

		2021	2022	2023	2024
Production					
Crude steel production	kt	2,281	2,299	2,376	2,302
Heavy plate production in total	kt	1,782	1,841	1,837	1,628
at Dillingen	kt	1,237	1,261	1,288	1,139
at Dunkirk (Dillinger France)	kt	545	580	549	489
Employees (without trainees)					
at Dillingen	per 31.12.	3,565	3,525	3,523	3,600
at Dunkirk (Dillinger France)	per 31.12.	510	527	535	548
Key financial data Dillinger					
Sales	millions of €	1,714	2,662	2,615	2,287
EBITDA	millions of €	173	408	377	326
EBIT	millions of €	112	347	321	273
Key financial data and total of employees of Dillinger Group (DHS consolidated)					
Sales	millions of €	2,281	3,390	3,349	2,963
EBITDA	millions of €	245	587	369	316
EBIT	millions of €	124	468	249	196
Employees	per 31.12.	5,645	5,595	5,335	5,484



The most important shareholdings of Dillinger (simplified)

Status: 01.06.2025

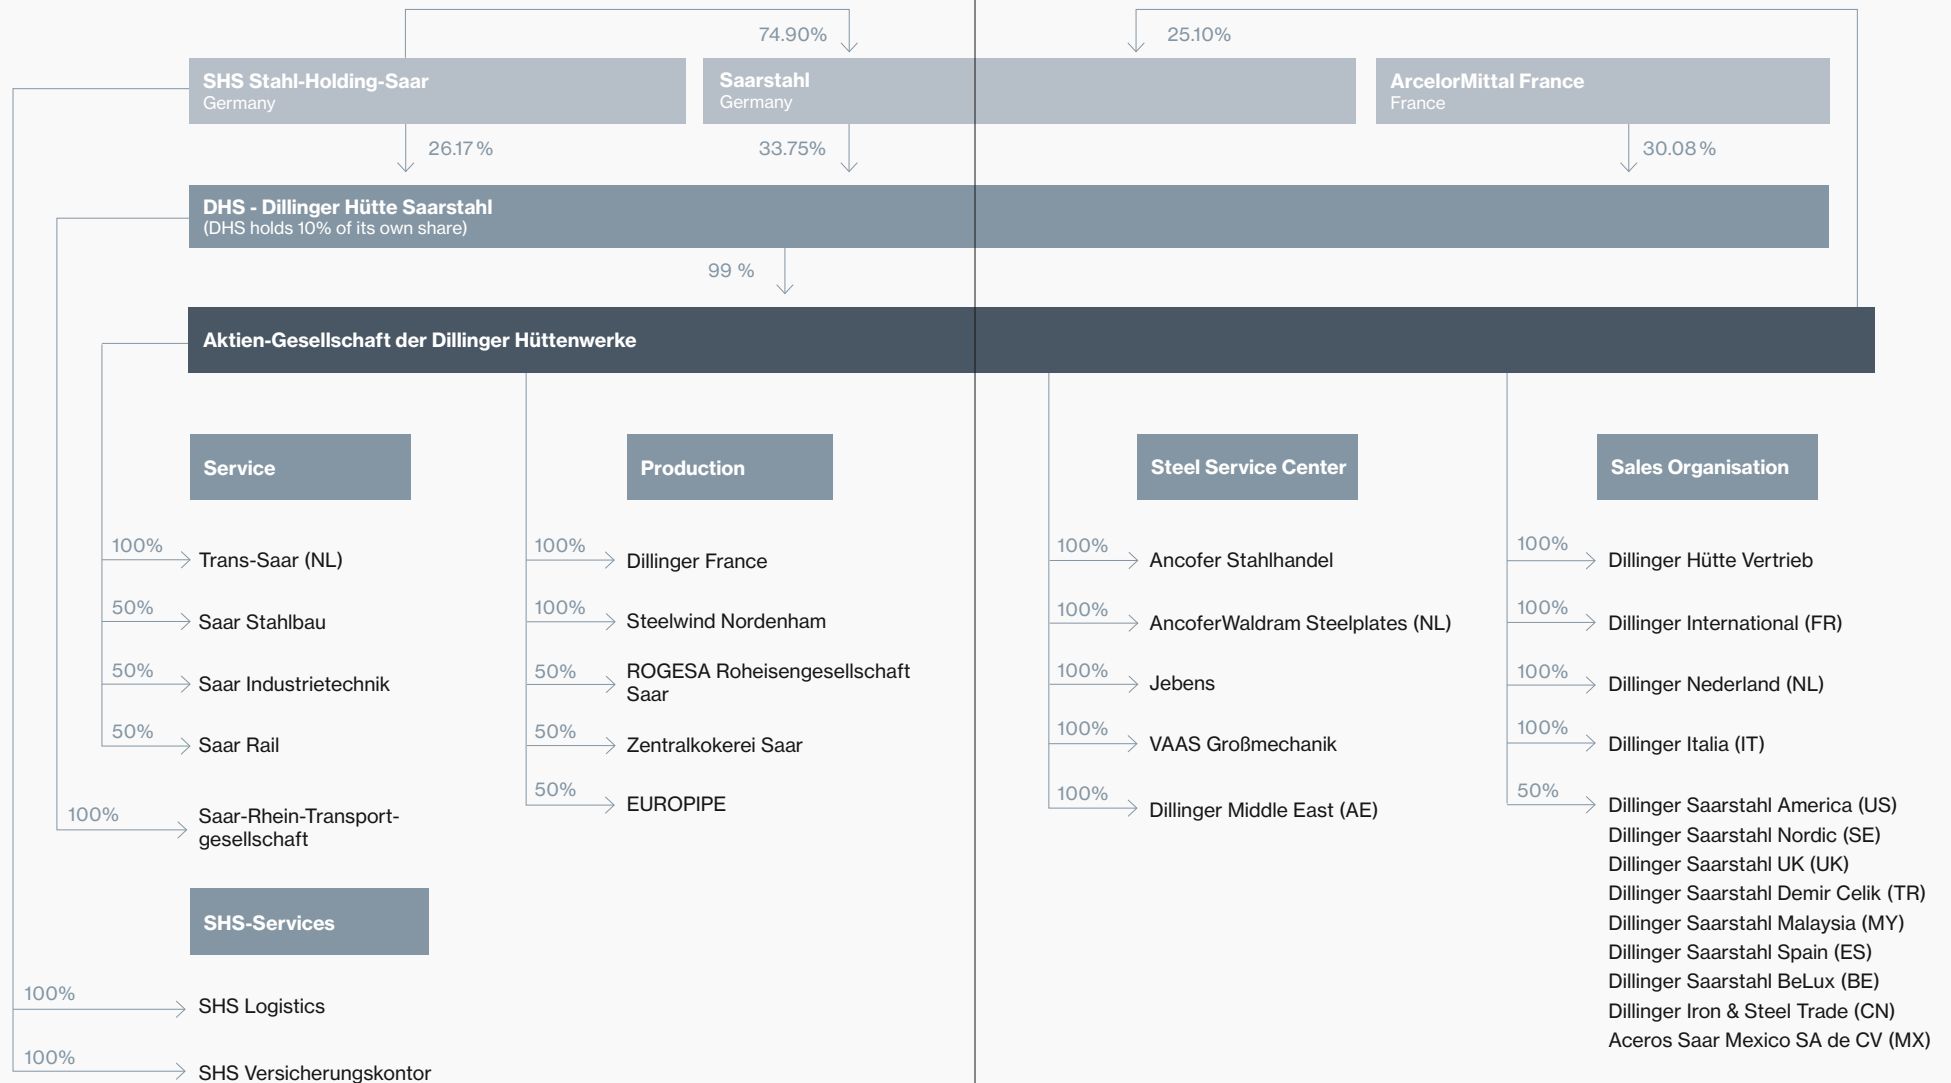

Hydropower plant Condemines

The enormous wall is 285 metres high and dams 400 million m³ of water. This water drives turbines that generate over 2 billion kWh of electricity every year.

Delivered quantity	1,742 t
Plate thickness	15 - 75 mm
Plate width/plate length	3,500 mm/10,250 mm



Offshore wind farm Kaskasi

The 342-megawatt wind farm can supply around 400,000 households per year with green electricity.

Delivered quantity	28,715 t
Plate thickness	40 - 90 mm
Quality	S355ML, S355G10+M, S460G2+M, S420ML



"Nordstern" bridge

Awarded at the European Steel Bridge Awards 2024 and the 10th Austrian Steel Construction Prize.


Delivered quantity	5,000 t
Plate thickness	10 - 100 mm
Quality	S235J2+N, S355J2+N, S355NL, S355K2+N, S355J2C+N



Industry sectors

Steel Construction
Hydropower Engineering
Pressure Vessels & Boilers
Earthmoving Machinery & Mining
Mechanical Engineering
Wind Power
Plastics & Concrete Moulds
Shipbuilding & Jackup


Offshore Installations
Large Diameter Pipes
H₂ Infrastructures
Protection
Steel Service Center & Distributors

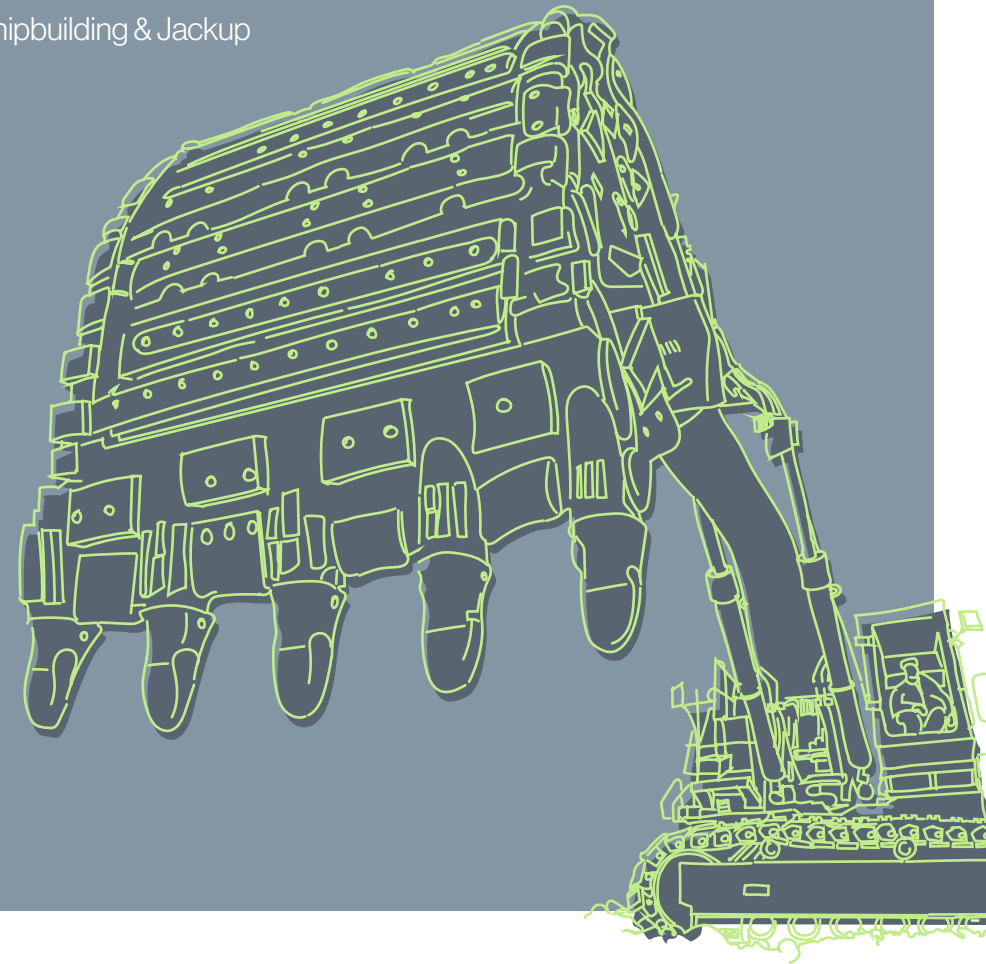

Dimensions for various delivery conditions

Plate dimensions beyond the standard dimension range are possible on request in many cases.

N, A	= normalized
TM	= thermomechanically rolled
Q, Q+A	= quenched/quenched + tempered
Max. plate length	28 m
Max. plate weight	42 t (up to 52 t in special cases)

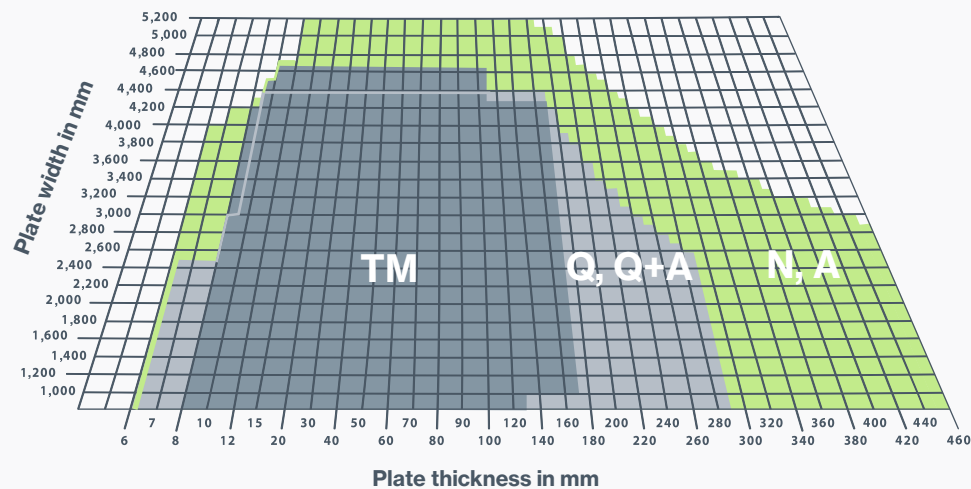

E-Service, myE-Service and E-Connect

The most important advantages at a glance

E-Service

- Help with selecting the most suitable steel
- Fast and efficient feasibility calculations
- A variety of useful tools to support manufacturing processes
- Electronic confirmation of arrival

myE-Service

- Important information about your current order status
- Direct access to order-related documents

E-Connect

- Automatic bar code scan for reliable identification of Dillinger heavy plates
- All certificate information and test results related to the individual plates
- Clear presentation of the chemical analysis and option of transferring the values directly into the standard calculation tools, thereby obtaining valuable data, e.g. the optimum pre-heating temperature for welding



dillinger.de/e-service



Contact

AG der Dillinger Hüttenwerke

Werkstraße 1
D-66763 Dillingen/Saar
Germany